


SMITH BERGER DECK MOUNTED BALANCED HEAD FAIRLEADS

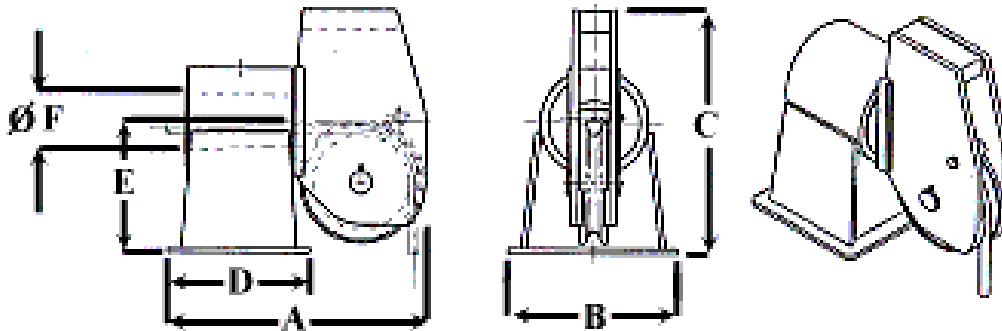

Model	Max wire size	Wire Breaking strength (kN)	Sheave Tread dia	A	B	C	D	E	F	Weight (Kg)
MD-610	19	262	210	602	406	511	375	279	114	122
MD-612	25	460	248	716	489	625	451	343	143	225
MD-614	32	711	286	776	508	714	470	394	160	304
MD-618	38	1014	362	968	641	921	533	495	216	658
MD-624	51	1530	508	1273	762	1138	686	648	305	1202
MD-630	57	2198	632	1445	1022	1543	699	800	330	2177
MC-636	64	2331	762	1600	1016	1784	699	921	368	2722
MD-652	76	3639	1118	2629	1330	2642	1118	876	673	7484
MD-665	76	3639	1410	2937	1330	2985	1118	876	673	8528

Dimensions in mm, alternations may occur.

Standard Features:

- Designed for breaking strength of wire with 90° wrap on sheave and +/- 90° rotation of swivelhead;
- Sealed grease lubricated Timken tapered roller bearings;
- Hardened rope grooves for longer life;
- Weld down base;
- Removable guide roller.

Optional Features:

- Tail Sheaves/Tail Rollers;
- Bolt down base;
- Load monitoring system;
- Special sheaves for high performance synthetic ropes;
- Paint to your specification;
- Third party certification.

